

Overview

The Signal Master is a simple-to-use accessory that adds enhanced features to Genesis strobes and horn-strobes as well as Enhanced Integrity strobes. It is a dual-purpose module that provides precision synchronization for connected strobes, and independent control for connected Genesis horns over a single pair of wires.

All Genesis and Enhanced Integrity strobes are self-synchronizing. When installed with the Signal Master, strobe flashes from devices on the same circuit are synchronized to within 10 milliseconds of each other *indefinitely*. This exceeds the latest UL 1971 requirements in effect as of November 2000, which specify this level of synchronization over only two hours.

When installed with Genesis horn-strobes, the Signal Master permits independent horn control (on, off, and coded signals) over a single pair of wires. Two methods of horn control are available: traditional NAC signal silence; or, normally-closed contact. Both methods may be used to silence horns without turning off strobes on the same circuit. Note: independent horn control is available for horn-strobes only. G1-P Series steady horns are not compatible with this feature.

Two mounting options ensure trouble-free installation of the Signal Master Module. The "snap-on" piggyback model doesn't require a separate electrical box. It simply snaps to the back of the first signal box on the circuit. The remote mount model mounts in a North American 2½ inch (64 mm) deep one-gang box. It may also be mounted to any SIGA-MP mounting plate, or directly to the rails provided inside BPS Remote Booster Power Supply cabinets.

Standard Features

- Compatible with Genesis and Enhanced Integrity products
- Provides UL 1971 compliant synchronization for all strobes on the same circuit
- Delivers independent horn control for horn-strobes over two-wire Genesis circuits. Two methods of horn control available: traditional NAC signal silence or normally-closed contact.
- Convenient snap-on or single-gang remote models
- Only one module required per circuit
- 3 amp rating (G1M-RM only)

Signal Master


G1M Series



One or more
patents pending.

Class B Wiring


Synchronized Strobes...

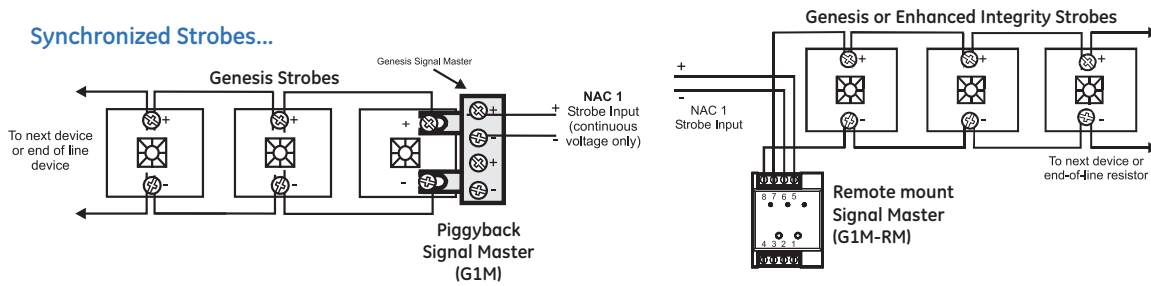


Notes

- Only one Signal Master is required for each horn, strobe, or horn-strobe circuit.
- The strobe circuit of the Signal Master requires a dedicated NAC. Strobe NAC circuit must be continuous in alarm mode.
- The Horn circuit of the Signal Master can be cascaded with other Genesis Signal Master modules on one NAC.
- When determining allowable wire resistance, refer to voltage rating of the Genesis Signal Master, the signaling device, and the control panel specifications. For synchronization, maximum allowable resistance between any two devices in the same viewing area is 20 Ohms.


Horn silence and synchronization with two NACs...

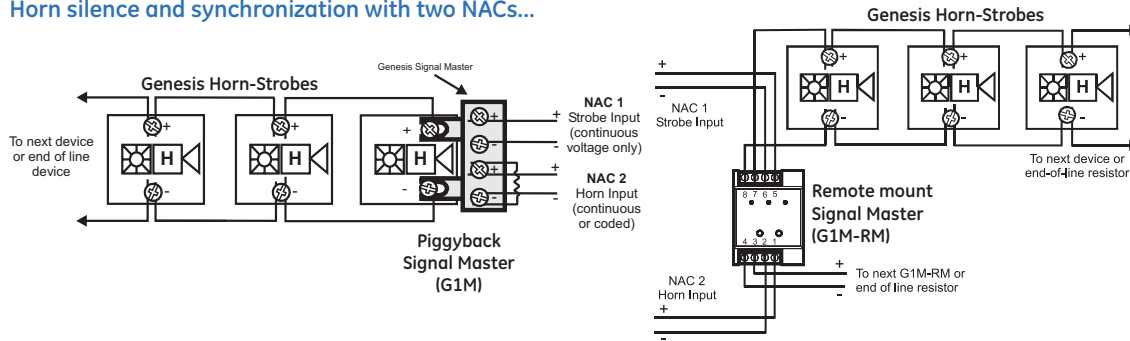


Horn Silence and synchronization with one NAC and one dry contact...

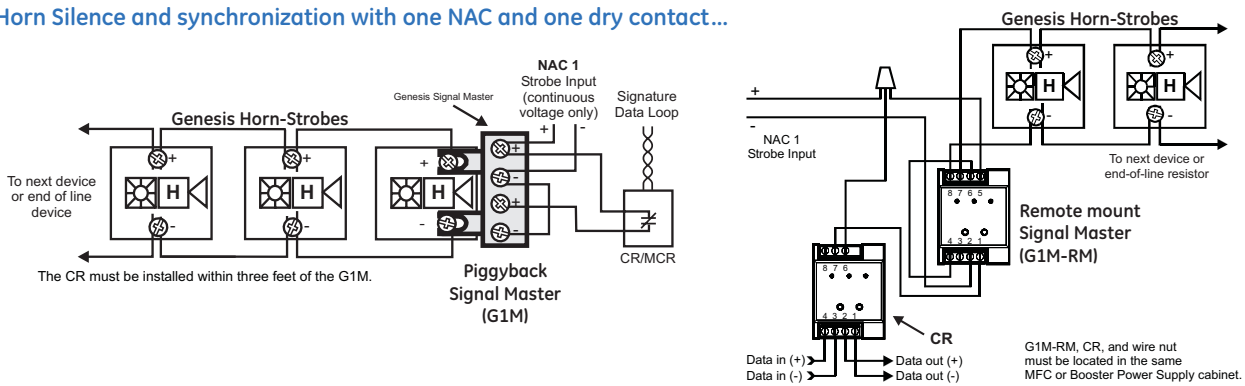

Synchronization with one NAC...

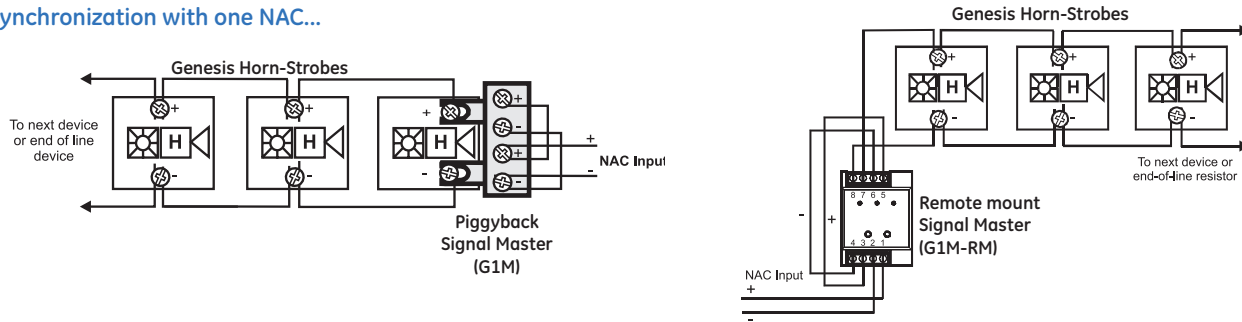


Enhanced Integrity Horn-strobes and Speaker-strobes...

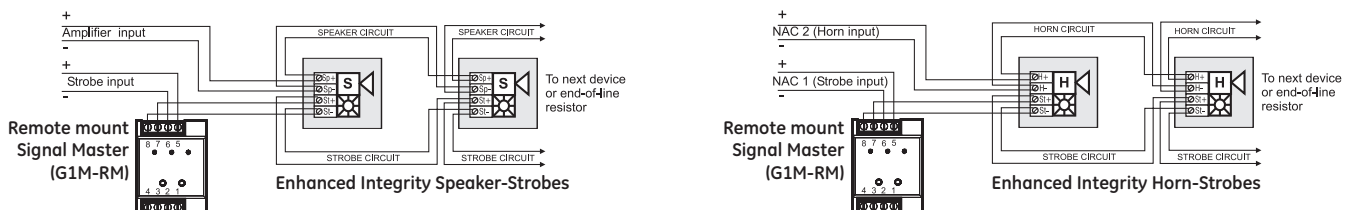


Class A Wiring

Class A wiring requires the SIGA-UM or SIGA-MAB.


Class A with Horn Silence using SIGA-MAB and SIGA-MCR modules

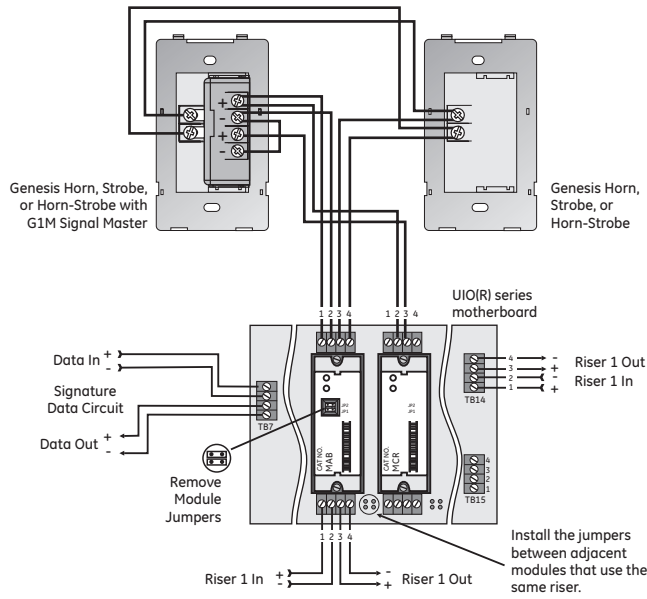


Class A without Horn Silence using a SIGA-MAB module

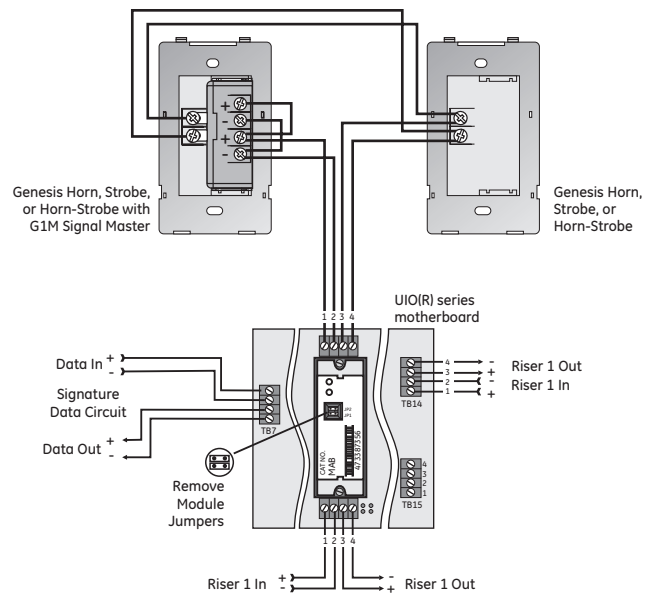

Class A with Horn Silence using SIGA-UM and SIGA-CR modules

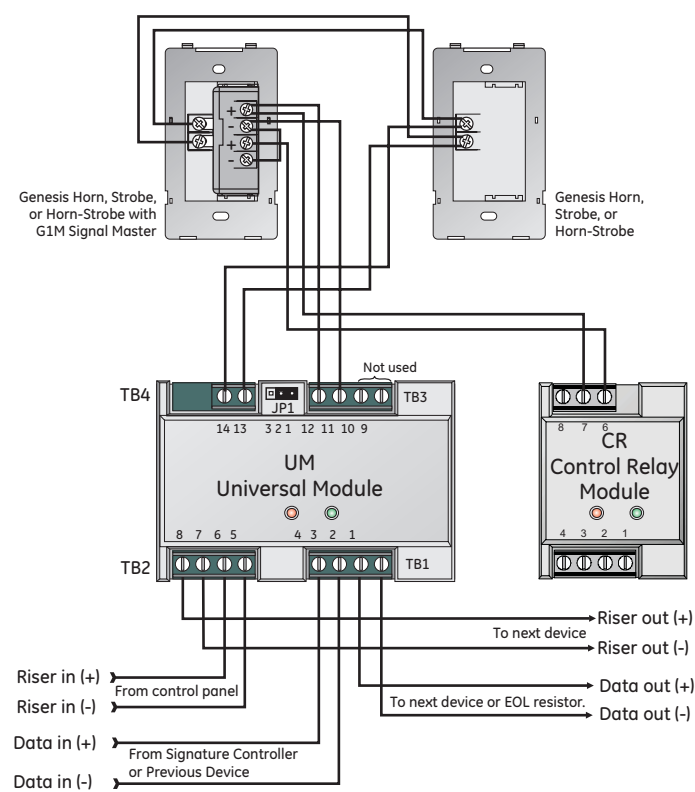

Class A without Horn Silence using a SIGA-UM module

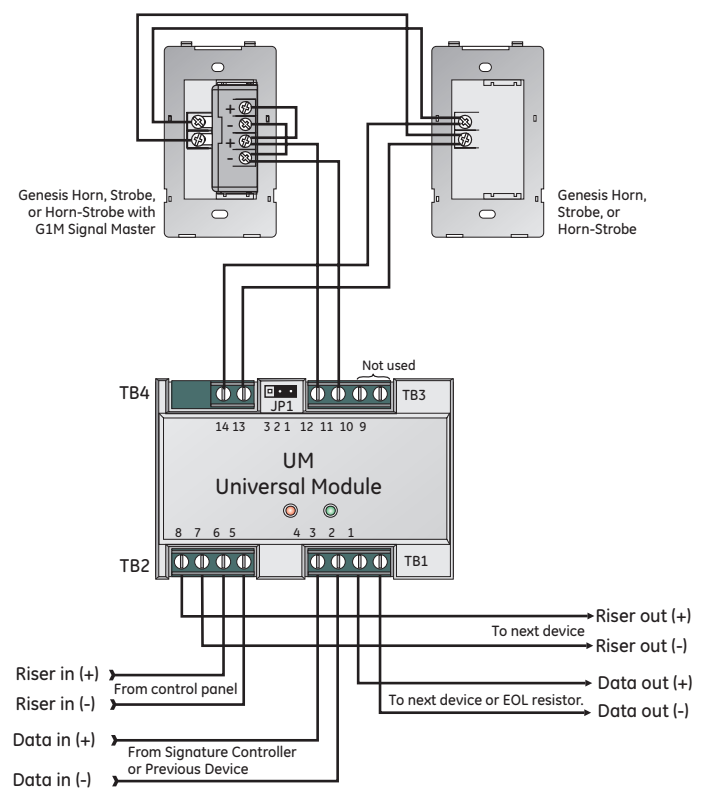

U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13


Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est


© 2006 General Electric Company
All Rights Reserved

Genesis Series is a Trademark
of GE Security.

Mounting



Install the G1M Signal Master by sliding the spade connectors into the terminals on the back of the signal.

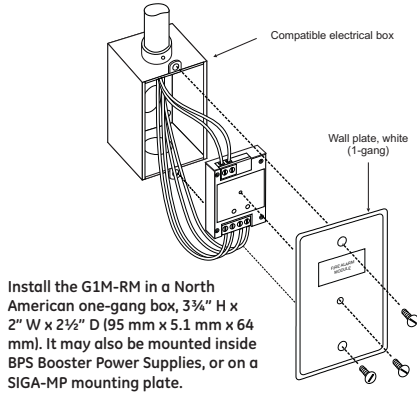

Install the G1M-RM in a North American one-gang box, 3¼" H x 2" W x 2½" D (95 mm x 5.1 mm x 64 mm). It may also be mounted inside BPS Booster Power Supplies, or on a SIGA-MP mounting plate.

Specifications

| | G1M piggyback model | G1M-RM remote mount model |
|-----------------------------|---|--|
| Mounting | Snaps to back of Genesis device | North American one-gang boxes 3¼" H x 2" W x 2½" D (95 mm x 5.1 mm x 64 mm) and 1½ inch (38 mm) deep 4 inch square boxes with one-gang covers, and SIGA-MP mounting plates |
| Wire Connections | #18 to #12 AWG (0.75 mm ² to 2.5 mm ²) | |
| Circuit Rating | 2 amps maximum | 3 amps maximum |
| Agency Listings/Approvals | UL 1971, UL 1638, UL 464, ULC S525, ULC S526, MEA, FM, CSFM, CE, FCC. | |
| Synchronization | One flash per second within 10 milliseconds indefinitely. Exceeds UL 1971 requirements. | |
| Operating voltage | 16 - 33 Vdc, 16 - 33 Vfwr | |
| Current Draw | 33 mA | |
| Operating temperature range | 32 - 120 °F (0 - 49 °C) | |
| Operating humidity range | 0 - 93% RH | |

Note: independent 2-wire horn control is available for horn-strobes only. G1-P Series steady horns are not compatible with this feature.

Ordering Information

| Catalog Number | Description | Ship Wt., lbs (kg) |
|----------------|---|--------------------|
| G1M | Genesis Signal Master Snap-on piggyback | 0.2 (0.1) |
| G1M-RM | Genesis Signal Master Remote Mount (1-gang) | |
| SIGA-MB4 | Transponder Mounting Bracket (allows for mounting two 1-gang modules in a 2-gang box) | 0.4 (0.15) |